


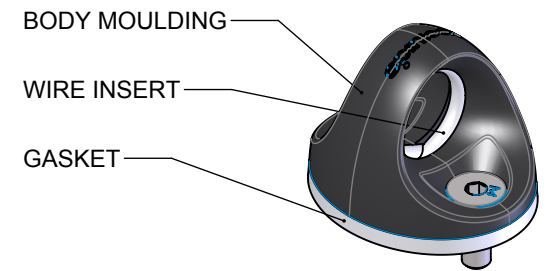
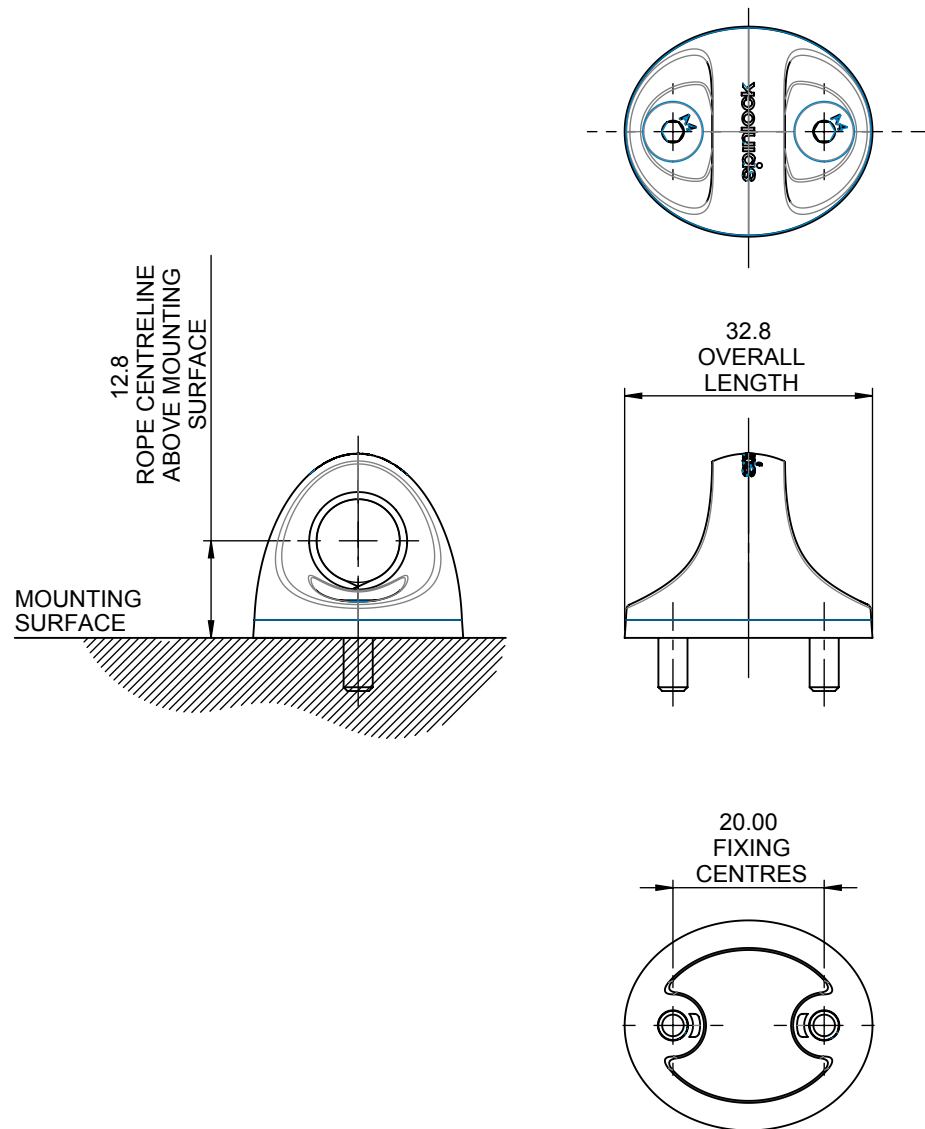










<b>spinlock</b>
SPINLOCK REFERENCE <b>BE06</b>
SCALE <b>ALL DIMENSIONS IN mm</b>
RECOMENDED FASTENERS <b>1 x M4 CSK (1 x 5/32")</b>

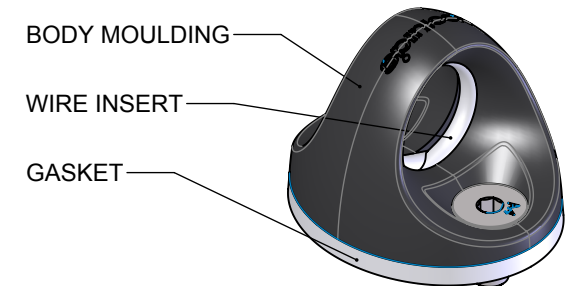

<b>spinlock</b>		<b>BE10/TF</b>	
ALL DIMENSIONS IN MM		LINE SIZE	MAX. 10.0mm DIA.
SCALE	<b>1:1</b>	PAGE SIZE	<b>A4</b>
		FASTENERS	2 X M4 C'SUNK HEAD
		MIN SPEC. A4-50 TO DIN7991 / ISO 10642	

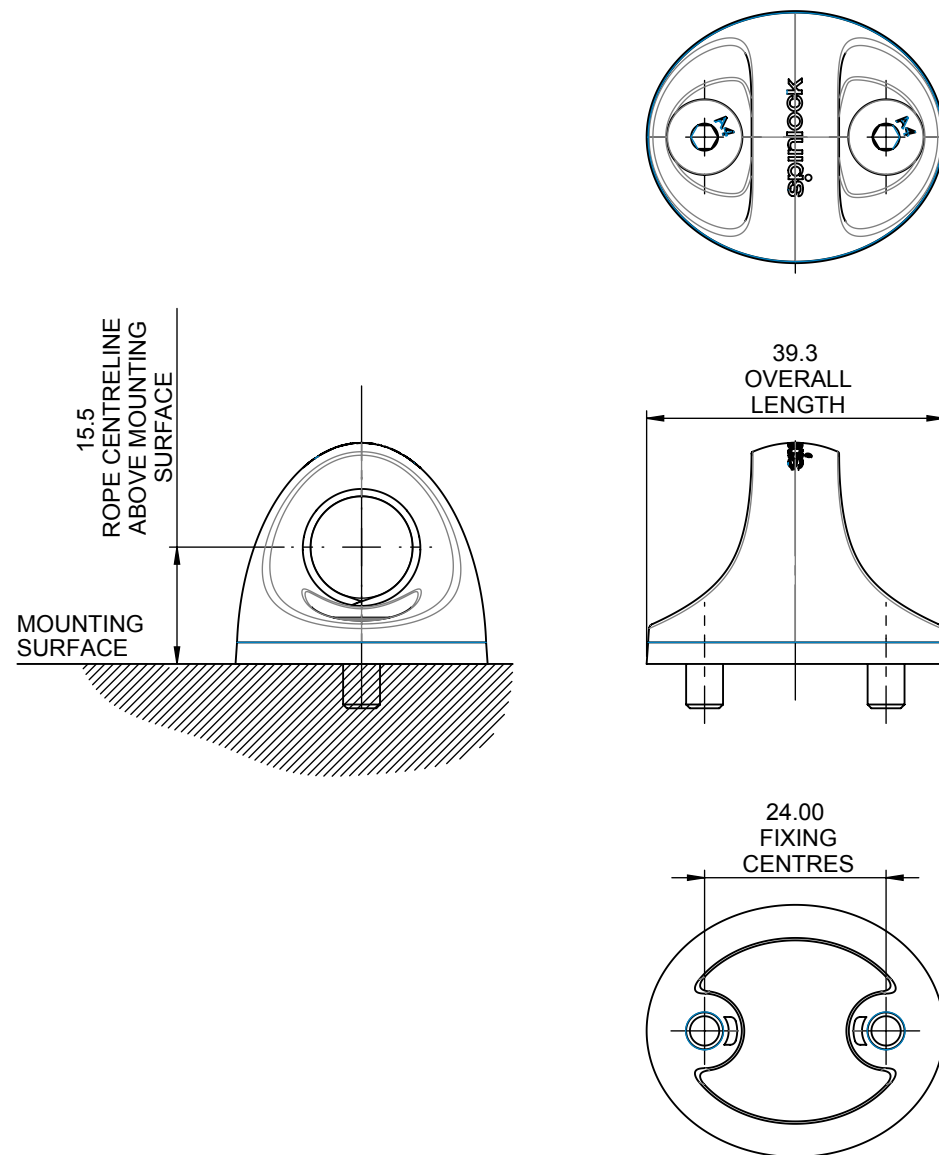

<b>spinlock</b>		<b>BE12/TF</b>	
ALL DIMENSIONS IN MM		<b>LINE SIZE</b>	MAX. 12.0mm DIA.
SCALE	<b>1:1</b>	<b>PAGE SIZE</b>	<b>A4</b>
		<b>FASTENERS</b>	2 x M5 C'SUNK HEAD MIN SPEC. A4-50 TO DIN7991 / ISO10642

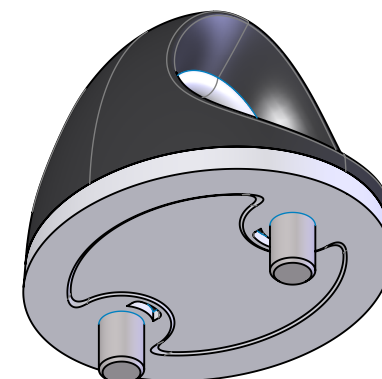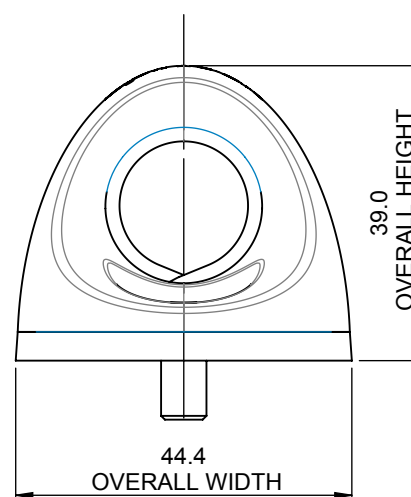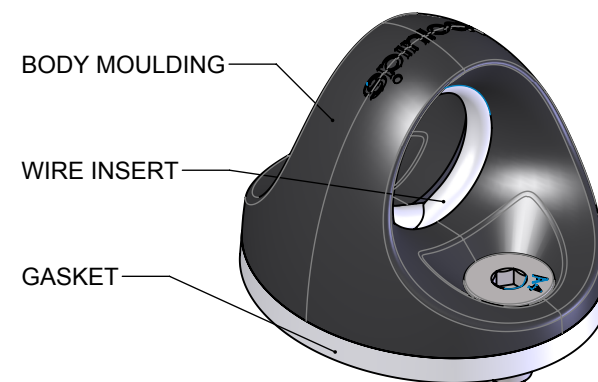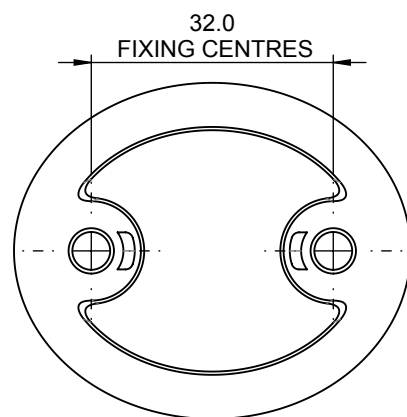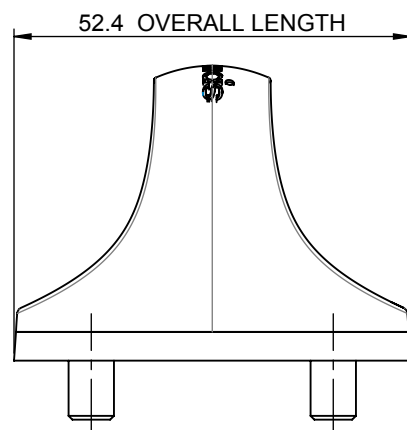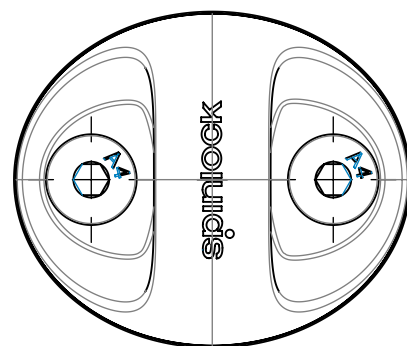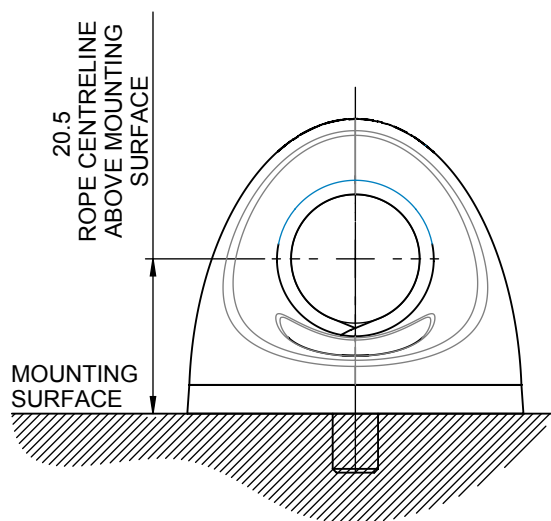

<b>spinlock</b>		<b>BE16/TF</b>	
ALL DIMENSIONS IN MM		<b>LINE SIZE</b>	MAX. 16.0mm DIA.
SCALE	<b>1:1</b>	<b>PAGE SIZE</b>	<b>A4</b>
	(297 x 210)	<b>FASTENERS</b>	2 x M6 C'SUNK HEAD MIN SPEC. A4-50 TO DIN7991 / ISO 10642